


Recessed Downlight Kit
Cevon Mini Tilt/Rotate CRI97 X-Low Glare



R501

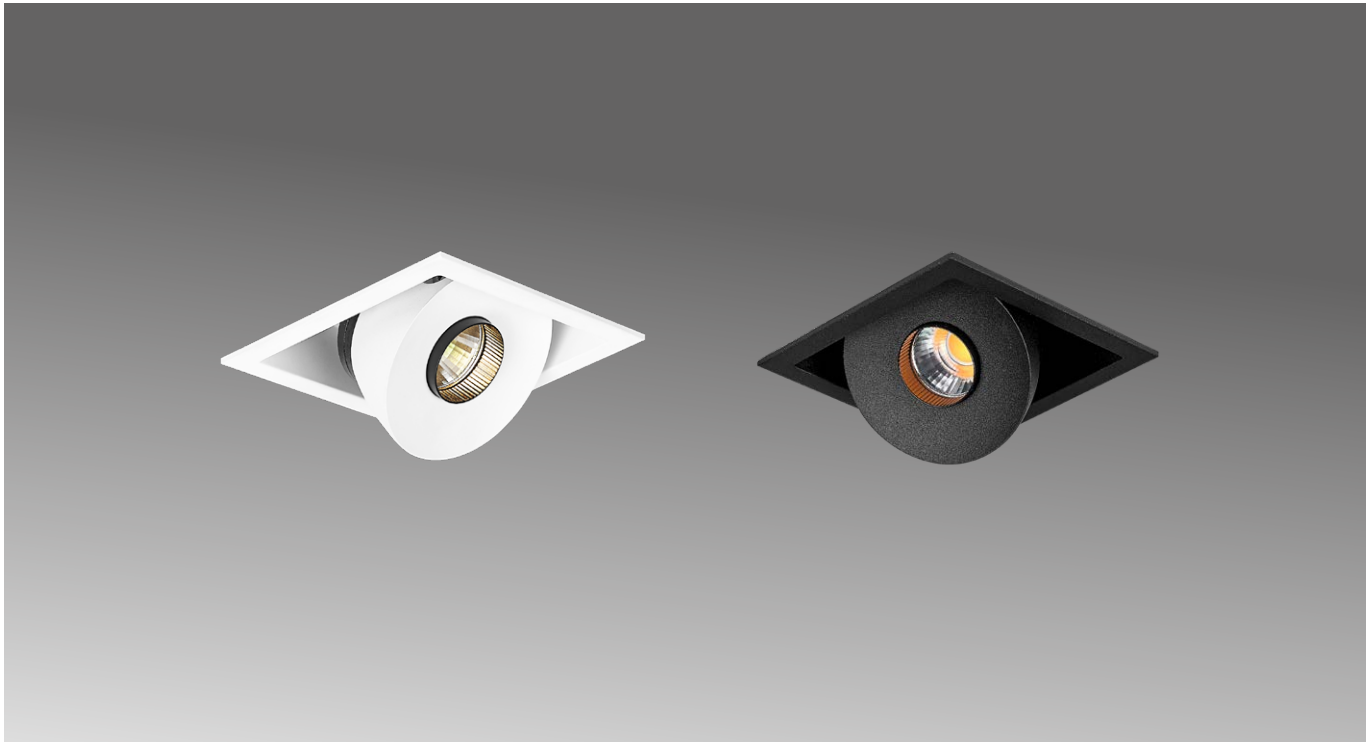

SPECIFICATIONS

DIMENSIONS	L79 x W78 x H91mm
CUT OUT	L70 x W70mm
COLOUR TEMP	3000K Warm White
CRI	97
LIFESPAN	55,000 Hours L90(10k) TM-21
BEAM ANGLE	42°
TILT	0 - 45°
ROTATE	0 - 355°
INTENSITY AT 2M	347 lux / 1.5m Beam Width from 2m Height
INTENSITY AT 3M	154 lux / 2.3m Beam Width from 3m Height
MATERIAL	Aluminum, coated optic glass
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired)
APPLICATION	Interior residential downlighting
WARRANTY	5 Year warranty

672 LUMENS	11 WATTS	AC 240V
-------------------	-----------------	----------------

	UID™ Dimmable Under Insulation Driver Included
---	--

COLOUR PARAMETERS

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
3000K	97.6	99.1	94.6	102.3

AVAILABLE IN

DESCRIPTION	CODE
White with Black Baffle 3000K	R501 W3K
Black with Black Baffle 3000K	R501 B3K