


Recessed Downlight Kit Tilt/Rotate Pirouette

R693

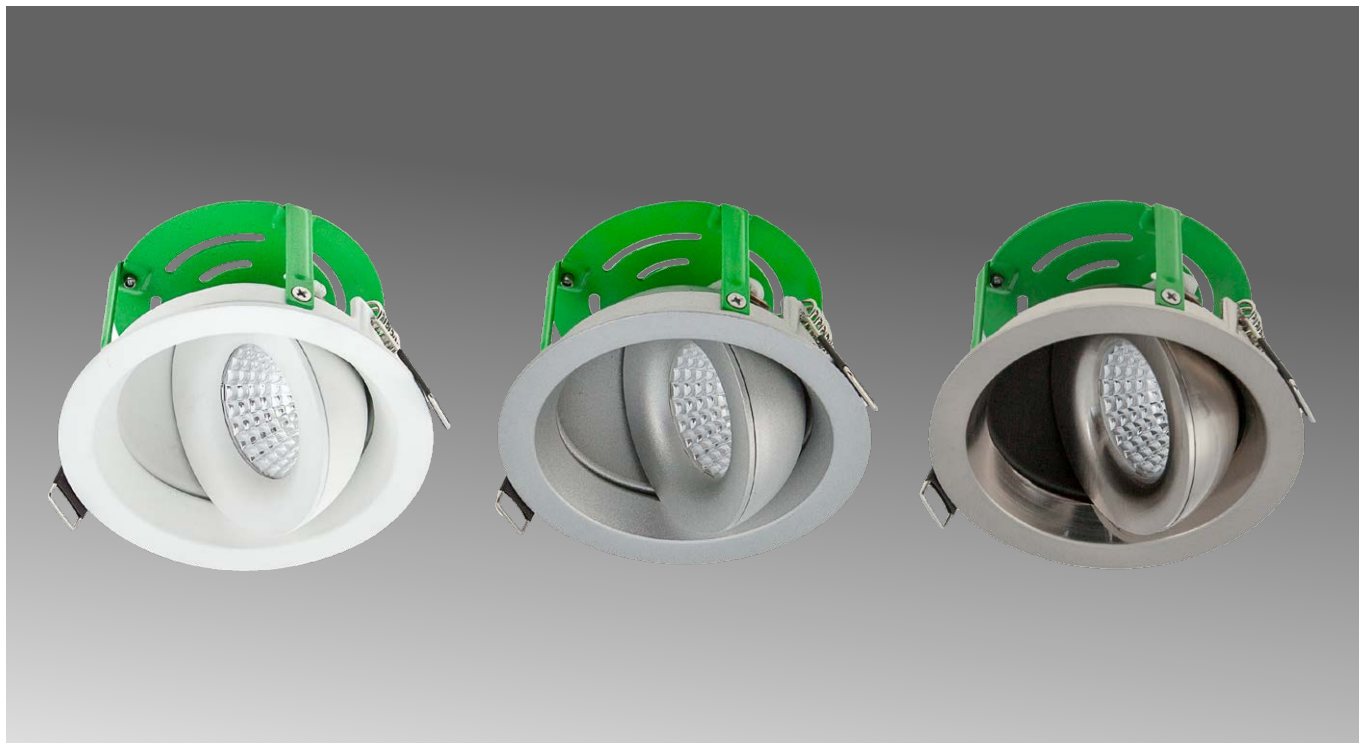

SPECIFICATIONS

DIMENSIONS	D105 x H60mm
CUT OUT	Ø 93mm
COLOUR TEMP	3000K Warm White
CRI	90
LIFESPAN	40,000 Hours
BEAM ANGLE	60°
TILT ANGLE	90°
ROTATE ANGLE	360°
MATERIAL	Aluminium
IP RATING	IP20
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired), 500mA
APPLICATION	Residential / Commercial Interior, ideal for illuminating paintings.
WARRANTY	5 Year Warranty

**670
LUMENS**

**9.5
WATTS**

**AC
240V**



UID™ Dimmable Under Insulation Driver Included

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R693 KWWUDL
Silver 3000K (8W, CRI80, 618lm) (End of line, available while stocks last)	R693 KSWUDL
Brushed Chrome 3000K (8W, CRI80, 618lm) (End of line, available while stocks last)	R693 KBCWUDL

Mini 4W version available R674 WL

