


Recessed Fixed Downlight Kit
Flat Series II Round

R921

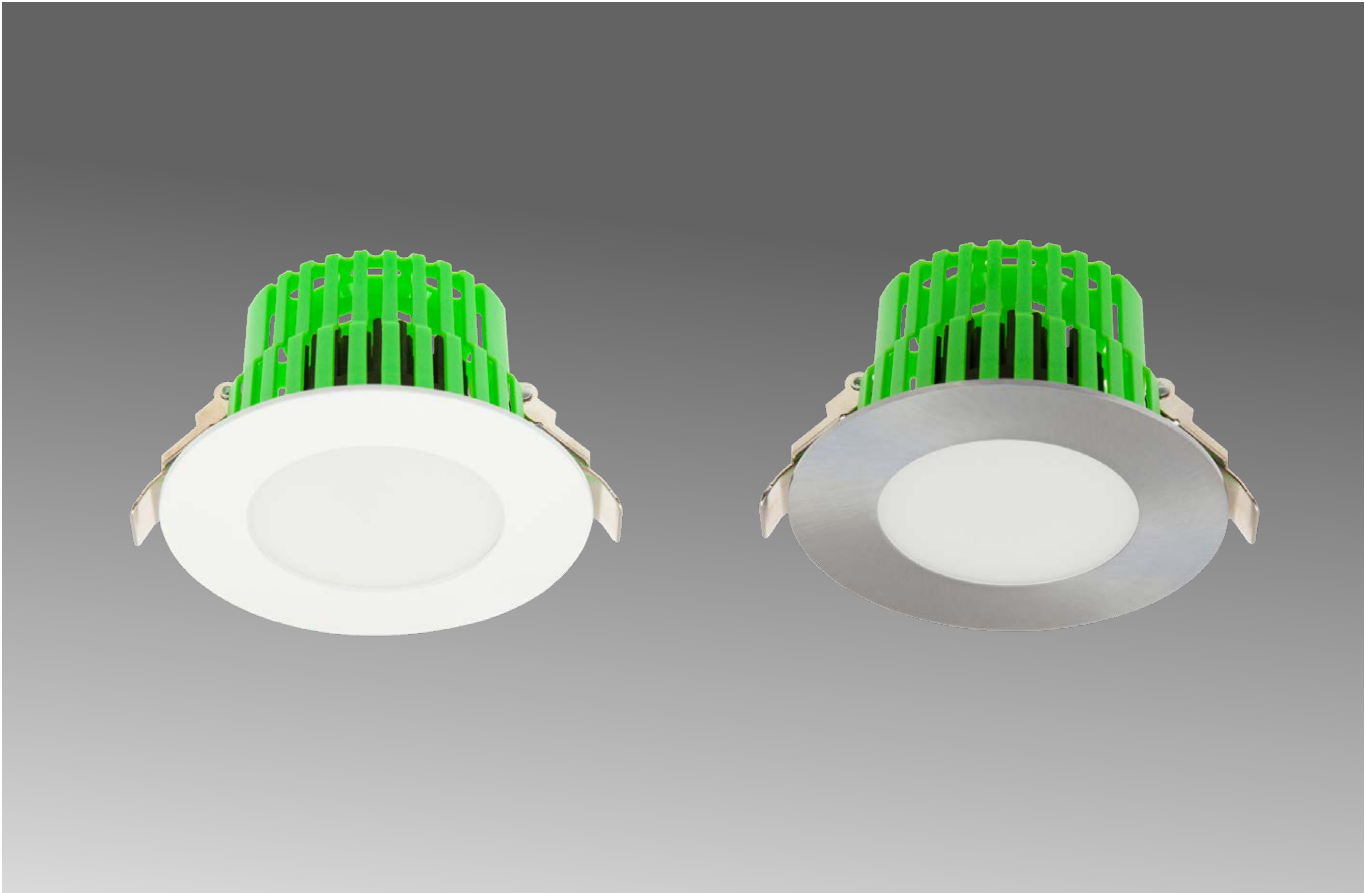

SPECIFICATIONS

DIMENSIONS	D120 x H66mm
CUT OUT	Ø 100mm
COLOUR TEMP	3000K Warm White
CRI	80
LIFESPAN	50,000 Hours
BEAM ANGLE	100°
MATERIAL	Aluminium
IP RATING	IP44
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired) 350mA
APPLICATION	Residential / Commercial Interior
WARRANTY	5 Year Warranty

950 LUMENS	13 WATTS	AC 240V
-------------------	-----------------	----------------

	UID™ Dimmable Under Insulation Driver Included
---	--

RETROFIT

Fits **100mm** Cut Outs

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R921 KWWUDL
Brushed Aluminium 3000K	R921 KBAWUDL