


Recessed Fixed Downlight Kit Flat Series II Square

R926

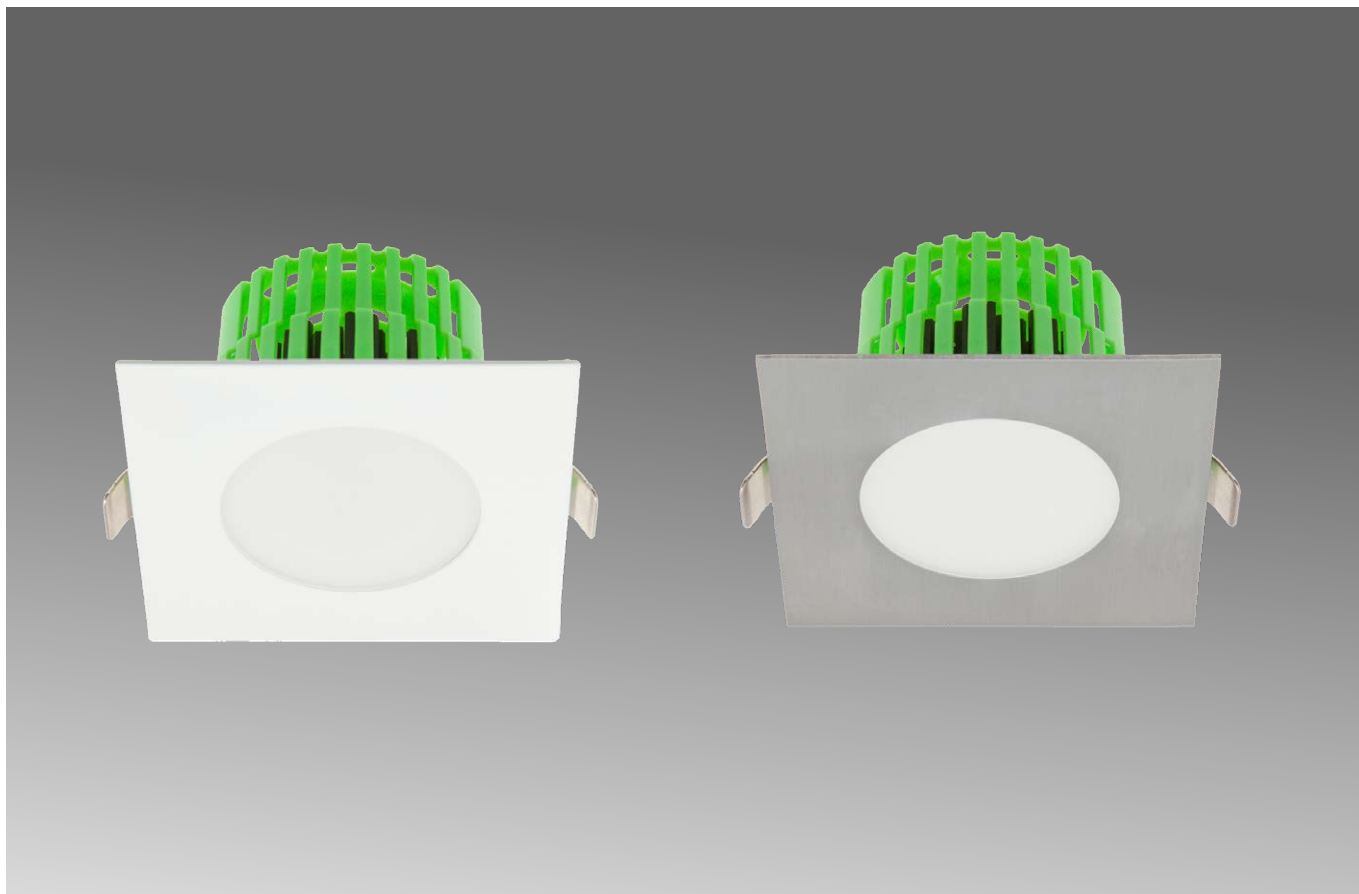

SPECIFICATIONS

DIMENSIONS	L120 x W120 x H66mm
CUT OUT	Ø 100mm
COLOUR TEMP	3000K Warm White
CRI	90
LIFESPAN	50,000 Hours
BEAM ANGLE	100°
MATERIAL	Aluminium
IP RATING	IP44
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired) 350mA
APPLICATION	Residential / Commercial Interior
WARRANTY	5 Year Warranty

**1000
LUMENS**

**13
WATTS**

**AC
240V**



UID™ Dimmable Under Insulation Driver Included

RETROFIT

Fits **100mm**
Cut Outs

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R926 KWWUDL
Brushed Aluminium 3000K (CRI80, 950lm)	R926 KBAWUDL