


Exterior Recessed Stair/Wall Light

Square Low Glare Dark Light

R936

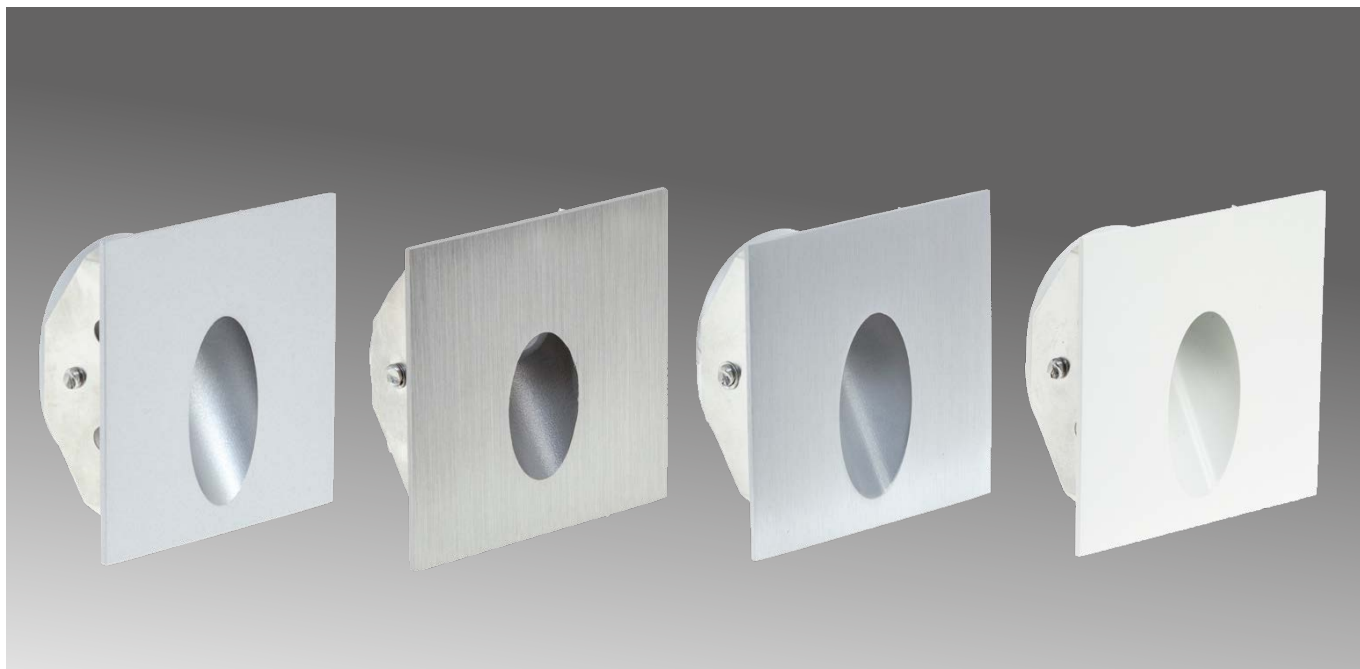

SPECIFICATIONS

DIMENSIONS	L78 x W78 x D38mm
CUT OUT	Ø 65mm
COLOUR TEMP	3000K Warm White
CRI	80
LIFESPAN	30,000 Hours
BEAM ANGLE	60°
MATERIAL	Aluminium or 316 STS
IP RATING	IP65
CLASSIFICATION	IC Rated
DRIVER	700mA (Not Included) Note: Can be run at 350mA to decrease wattage and output by 20%
APPLICATION	Suitable for zero clearance installs. Shallow profile.
WARRANTY	5 Year Warranty

95 LUMENS	3 WATTS	700mA SERIES
---------------------	-------------------	------------------------

	Driver sold separately, specify when ordering.
--	--

IMPORTANT:

1. Connection to live driver will permanently damage all lighting on circuit. Halcyon takes no responsibility for product failures from incorrect wiring.
2. Constant current LED fittings must be wired in series ensuring correct polarity. Incorrect polarity / wiring will cause permanent LED and/or driver failure.
3. Pulsing/flashing lighting indicates wiring fault or under/overloaded driver power off immediately.

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R936 WL3
Brushed 316 Stainless Steel 3000K	R936 BSL3
Brushed Aluminium 3000K (End of line, available while stocks last)	R936 BAL3
Silver 3000K (End of line, available while stocks last)	R936 SL3

ACCESSORIES

DESCRIPTION	CODE
Concrete Installation Plastic Housing (cutout Ø76mm)	R935 HO

