




**Technical data**

- Classification ETIM 5/6**  
ETIM 5.0/6.0 Class-ID: EC000005  
ETIM 5.0/6.0 Class-Description: Cable end sleeve
- Note**  
Halogen-free
- Material**  
Copper/PP  
Surface: tin-plated
- Temperature range**  
-5°C to +105°C\*



**Conductor end sleeves insulated**

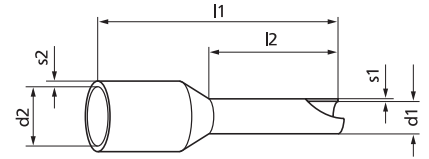

**Benefits**

- Funnel-shaped opening makes it easy to slip them onto the strands
- The conductor is permanently connected to the collar by crimping

- For cables with category 2,5 and 6 conductors
- Not suitable for solid conductors

**Suitable tools**

- PEW 8.185 crimping pliers refer to page 999
- PEW 8.186 crimping pliers refer to page 999
- PEW 8.87 crimping pliers refer to page 1000
- CK 90 crimping pliers refer to page 1001

**Norm references / Approvals**

- All DIN conductor end-sleeves are in accordance with DIN 46228 Part 4
- CSA approved, File-Number: LR 105629-1

**Application range**

- Control cabinets and equipment wiring

Article number	Article designation	For mm <sup>2</sup>	AWG	Colour	l1 mm	l2 mm	d1 mm	s1 mm	d2 mm	s2 mm	Pieces / PU
<b>Conductor end sleeves insulated</b>											
61721866	AHI N 0,25/6	0.25	24	light blue	10.5	6	0.8	0.25	1.8	0.25	500
61721867	AHI L 0,25/8	0.25	24	light blue	12.5	8	0.8	0.25	1.8	0.25	500
61721868	AHI N 0,34/6	0.34	24	turquoise	10.5	6	0.8	0.25	2	0.25	500
61721869	AHI L 0,34/8	0.34	24	turquoise	12.5	8	0.8	0.25	2	0.25	500
61801580	AHI DIN K 0,5/6	0.50	20	white	11.5	6	1.1	0.15	2.5	0.25	500
61801590	AHI DIN N 0,5/8	0.50	20	white	13.5	8	1.1	0.15	2.5	0.25	500
61801600	AHI DIN HL 0,5/10	0.50	20	white	15.5	10	1.1	0.15	2.5	0.25	500
61721871	AHI N 0,5/8	0.50	20	orange	13.5	8	1.1	0.15	2.5	0.25	500
61801620	AHI DIN K 0,75/6	0.75	20	grey	12	6	1.3	0.15	2.8	0.25	500
61801630	AHI DIN N 0,75/8	0.75	20	grey	14	8	1.3	0.15	2.8	0.25	500
61801640	AHI DIN HL 0,75/10	0.75	20	grey	16	10	1.3	0.15	2.8	0.25	500
61801650	AHI DIN L 0,75/12	0.75	20	grey	18	12	1.3	0.15	2.8	0.25	500
61721880	AHI N 0,75/8	0.75	20	white	14	8	1.3	0.15	2.8	0.25	500
61801660	AHI DIN K 1/6	1.00	18	red	12.5	6	1.5	0.15	3	0.3	500
61801670	AHI DIN N 1/8	1.00	18	red	14.5	8	1.5	0.15	3	0.3	500
61801680	AHI DIN HL 1/10	1.00	18	red	16.5	10	1.5	0.15	3	0.3	500
61801690	AHI DIN L 1/12	1.00	18	red	18.5	12	1.5	0.15	3	0.3	500
61721890	AHI N 1/8	1.00	18	yellow	14.5	8	1.5	0.15	3	0.3	500
61801700	AHI K 1,5/6	1.50	16	black	12.5	6	1.8	0.15	3.4	0.3	500
61801710	AHI DIN N 1,5/8	1.50	16	black	14.5	8	1.8	0.15	3.4	0.3	500
61801720	AHI DIN HL 1,5/10	1.50	16	black	16.5	10	1.8	0.15	3.4	0.3	500
61801730	AHI DIN L 1,5/18	1.50	16	black	24.5	18	1.8	0.15	3.4	0.3	500
61721900	AHI N 1,5/8	1.50	16	red	14.5	8	1.8	0.15	3.4	0.3	500
61721910	AHI HL 1,5/10	1.50	16	red	16.5	10	1.8	0.15	3.4	0.3	500
61746720	AHI L 1,5/18	1.50	16	red	24.5	18	1.8	0.15	3.4	0.3	500
61801750	AHI DIN N 2,5/8	2.50	14	blue	15	8	2.3	0.15	4.2	0.3	500
61801760	AHI DIN HL 2,5/12	2.50	14	blue	19	12	2.3	0.15	4.2	0.3	500
61801770	AHI DIN L 2,5/18	2.50	14	blue	25	18	2.3	0.15	4.2	0.3	500
61801780	AHI DIN N 4/10	4.00	12	grey	17.5	10	2.9	0.2	4.8	0.3	500
61801790	AHI DIN HL 4/12	4.00	12	grey	20	12	2.9	0.2	4.8	0.3	500
61801800	AHI DIN L 4/18	4.00	12	grey	26	18	2.9	0.2	4.8	0.3	100
61801810	AHI DIN N 6/12	6.00	10	yellow	20	12	3.6	0.2	6.2	0.3	100
61801820	AHI DIN L 6/18	6.00	10	yellow	25	18	3.6	0.2	6.2	0.3	100
61721940	AHI N 6/12	6.00	10	black	20	12	3.6	0.2	6.2	0.3	100
61721950	AHI L 6/18	6.00	10	black	26	18	3.6	0.2	6.2	0.3	100
61801830	AHI DIN N 10/12	10.00	8	red	21	12	4.6	0.2	7.5	0.3	100
61801840	AHI DIN L 10/18	10.00	8	red	27	18	4.6	0.2	7.5	0.3	100
61721960	AHI N 10/12	10.00	8	ivory	21	12	4.6	0.2	7.5	0.3	100
61721970	AHI L 10/18	10.00	8	ivory	27	18	4.6	0.2	7.5	0.3	100
61801850	AHI DIN N 16/12	16.00	6	blue	23	12	6	0.2	8.8	0.4	100
61801860	AHI DIN L 16/18	16.00	6	blue	29	18	6	0.2	8.8	0.4	100
61721980	AHI N 16/12	16.00	6	green	23	12	6	0.2	8.8	0.4	100
61721990	AHI L 16/18	16.00	6	green	29	18	6	0.2	8.8	0.4	100
61801870	AHI DIN N 25/16	25.00	4	yellow	29	16	7.5	0.2	11	0.5	50
61801890	AHI DIN L 25/22	25.00	4	yellow	35	22	7.5	0.2	11	0.5	50
61746770	AHI N 25/16	25.00	4	brown	29	16	7.5	0.2	11	0.5	50
61746780	AHI L 25/22	25.00	4	brown	35	22	7.5	0.2	11	0.5	50
61801900	AHI DIN N 35/16	35.00	2	red	30	16	8.5	0.2	12.5	0.5	50
61801920	AHI DIN L 35/25	35.00	2	red	39	25	8.5	0.2	12.5	0.5	50
61746790	AHI N 35/16	35.00	2	beige	30	16	8.5	0.2	12.5	0.5	50
61746800	AHI L 35/25	35.00	2	beige	39	25	8.5	0.2	12.5	0.5	50
61801930	AHI DIN N 50/20	50.00	1	blue	36	20	10.5	0.3	15	0.6	50
61801940	AHI DIN L 50/25	50.00	1	blue	41	25	10.5	0.3	15	0.6	50
61801950	AHI N 70/20	70.00	2/0	yellow	37	20	13.5	0.4	16	0.6	25
61801960	AHI L 70/27	70.00	2/0	yellow	44	27	12.7	0.4	16	0.6	25
61801970	AHI N 95/25	95.00	3/0	red	44	25	14.7	0.4	18	0.6	25
61801980	AHI N 120/27	120.00	4/0	blue	48	27	16.7	0.5	21	0.7	25
61801990	AHI N 150/32	150.00	300	yellow	58	32	19.5	0.5	23	1	25

K = short; N = medium; HL = large; L = extra large; Other sizes and colours are available upon request / Photographs and graphics are not to scale and do not represent detailed images of the respective products. / \*Under some circumstances the end sleeves withstand temperatures under -5°C. Please contact Lapp Kabel to clarify the specific application area. The manufacturing tolerance is +/- 0.4 mm.