


Recessed Fixed Downlight Kit Cevon CRI97 Pin Hole Fixed Highlighter




R515

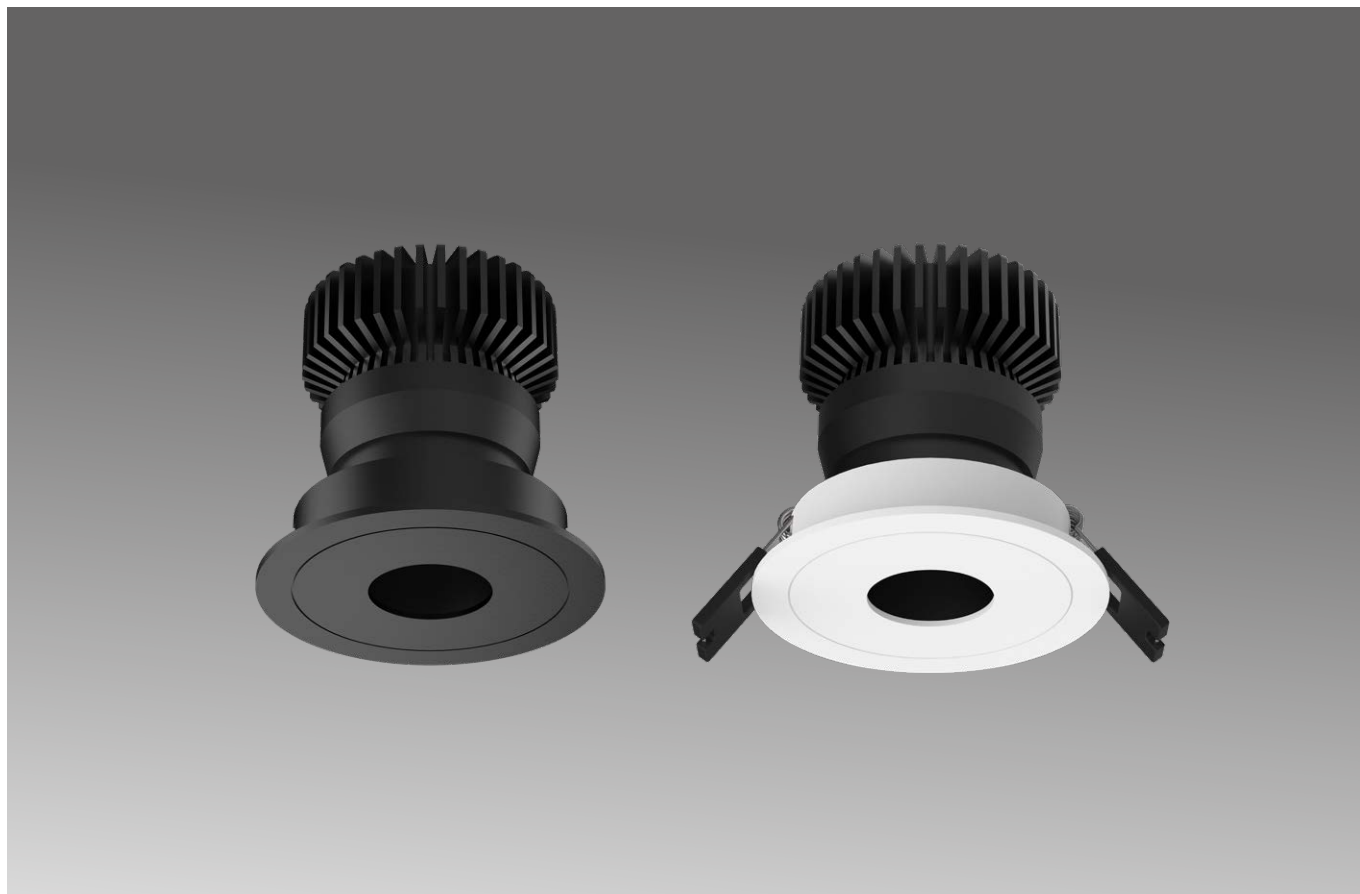

SPECIFICATIONS

DIMENSIONS	D84 x H85mm
CUT OUT	Ø 70mm
COLOUR TEMP	3000K Warm White
CRI	97
LIFESPAN	55,000 Hours L90(10k) TM-21
BEAM ANGLE	35°
INTENSITY AT 2M	268 lux / 1.3m Beam Width from 2m Height
INTENSITY AT 3M	119 lux / 1.9m Beam Width from 3m Height
MATERIAL	Aluminum , coated optic glass
IP RATING	IP20
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired)
APPLICATION	Interior residential downlighting
WARRANTY	5 Year Warranty

370 LUMENS	11 WATTS	AC 240V
----------------------	--------------------	-------------------

	UID™ Dimmable Under Insulation Driver Included
---	--

COLOUR PARAMETERS

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
3000K	97.6	93.9	94.9	101.0

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	R515 W3K
Black 3000K	R515 B3K